



Features:

- 2 UP to 25.78Gb/s bi-directional data links
- 2 Hot-Pluggable SFP28 footprint
- 2 Duplex LC connector
- 2 1271nm DFB laser transmitter for 3CW-SFP28-23-ER
- 2 1331nm DFB laser transmitter for 3CW-

SFP28-32-ER

- 2 Up to 40km on 9/125m SMF
- 2 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- 2 Power Supply :+3.3V
- 2 Operating case temperature Range:
Commercial: 0~ 70°C
Extended:-5~85°C
Industrial:-40~ 85°C
- 2 RoHS compliant

Applications:

- 2 25GE ER
- 2 eCPRI&CPRI

Part Number Ordering Information

3CWI-SFP28-23-ER	SFP28 ER 40Km BIDI optical transceiver with full real-time digital diagnostic monitoring ,1271nm Transmitter&1331nm Receiver,-40~85°C, 25GE
3CWI-SFP28-32-ER	SFP28 ER 40Km BIDI optical transceiver with full real-time digital diagnostic monitoring , 1331nm Transmitter&1271nm Receiver, -40~85°C, 25GE
3CW-SFP28-23-ER	SFP28 ER 40Km BIDI optical transceiver with full real-time digital diagnostic monitoring ,1271nm Transmitter&1331nm Receiver, 0~70°C, 25GE
3CW-SFP28-32-ER	SFP28 ER 40Km BIDI optical transceiver with full real-time digital diagnostic monitoring , 1331nm Transmitter&1271nm Receiver, 0~70°C, 25GE

Description:

3C-LINK's 3CW-SFP28-23/32-ER SFP28 transceivers are designed for use in Ethernet links up to 25.78 Gb/s data rate and up to 10 km link length. They are compliant SFF-8472 , and compatible with SFF-8432 and applicable portions of SFF-8431. The product is RoHS compliant and lead-free per Directive 2011/96/EU.

PRODUCT SELECTION

I Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Fault	Module transmitter Fault	2
3	Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4
5	SCL	2 wire serial interface clock input (SCL)	4
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.	
8	LOS	Receiver Loss of Signal Indication	
9	RS1	Rate select1: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter non-inverted data out put	
19	TD-	Transmitter inverted data out put	
20	VeeT	Module transmitter ground	1

Note:

1. The module ground pins shall be isolated from the module case.
2. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.
3. This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
4. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

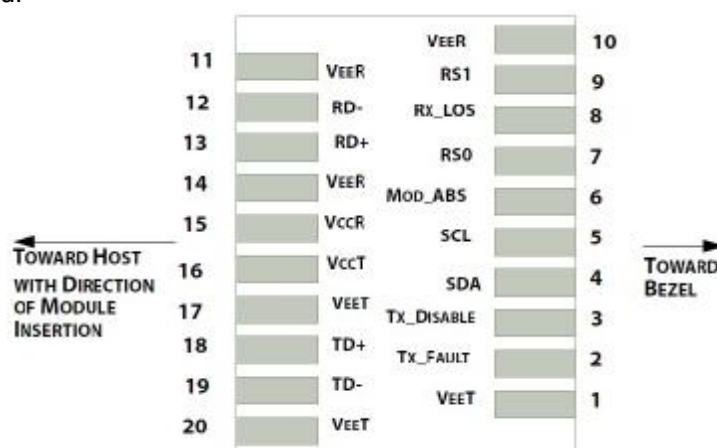


Diagram of Host Board Connector Block Pin Numbers and Names

I Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Storage Temperature	T _s	-40		+85	°C	

Case Operating Temperature	T _A	0		+70	°C	Commercial
		-5		+85	°C	Extended
		-40		+85	°C	Industrial
Maximum Supply Voltage	V _{CC}	0		3.6	V	
Relative Humidity(Non-condensing)	RH	0		85	%	

I Electrical Characteristics (VCC = 3.15 to 3.46 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{CC}	3.14		3.46	V	
Supply Current	I _{CC}			300	mA	Commercial
				360	mA	Extended
				360	mA	Industrial
Power Consumption	P			1	W	Commercial
				1.2	W	Extended
				1.2	W	Industrial
Data Rate	R	24.3		26.5	Gb/s	
Fiber Length	L			10	KM	
Transmitter Section:						
Input differential impedance	R _{in}		100		Ω	1
Differential input voltage swing	V _{in,pp}	180		450	mV	2
Transmit Disable Voltage	V _D	2		V _{CC}	V	3
Transmit Enable Voltage	V _{EN}	V _{EE}		V _{EE} +0.8	V	
Receiver Section:						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Rx Output Diff Voltage	V _O	180		450	mV	
LOS Fault	V _{LOS fault}	2		V _{CC,HOST}	V	4
LOS Normal	V _{LOS norm}	V _{EE}		V _{EE} +0.8	V	4

Note:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Per SFF-8431 Rev 3.0
3. Into 100 ohms differential termination.
4. LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

I Optical Characteristics (VCC = 3.15 to 3.46 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Center Wavelength	λ _t	1265	1271	1277	nm	

		1325	1331	1337	nm	
spectral width(-20dB)	$\Delta\lambda$			1	nm	
Average Optical Power	Pavg	-3.0		+3.0	dBm	1
Laser Off Power	Poff			-30	dBm	
Side Mode Suppression Ratio		30				
Extinction Ratio	ER	3.5			dB	
Optical Return Loss Tolerance				-12	dB	
Receiver Section:						
Center Wavelength	λ_r	1325	1331	1337	nm	
		1265	1271	1277	nm	
Receiver Sensitivity	Sen			-15	dBm	2
Los Assert	LOS _A	-30		-	dBm	
Los Dessert	LOS _D			-18	dBm	
Los Hysteresis	LOS _H	0.5			dB	
Overload		2			dBm	

Note:

1. Average power figures are informative only, per IEEE802.3cc.
2. Receiver sensitivity is informative. Shall be measured with conformance test signal for . BER =5x 10⁻⁵.

I Timing Characteristics


Parameter	Symbol	Min.	Typical	Max.	Unit
TX_Disable Assert Time	t_off			100	us
TX_Disable Negate Time	t_on			2	ms
Time to Initialize 2-wire interface	t_2w_start_up			300	ms
Time to Initialize	t_start_up			300	ms
Time to Initialize cooled module and time to power up a cooled module to Power level II	t_start_up_cooled			90	s
Time to Power Up to Level II	t_power_level2			300	ms
Time to Power Down from Level II	t_power_down			300	ms
Tx_Fault assert	Tx_Fault_on			1	ms
Tx_Fault assert for cooled module	Tx_Fault_on_cooled			50	ms
TX_FAULT Reset	t_reset	10			us
Rx_LOS assert delay	t_los_on			100	us
Rx_LOS negate delay	t_los_off			100	us

I Digital Diagnostic Specifications


Parameter	Symbol	Units	Min	Max	Accuracy	Note
Transceiver Temperature	DDDTemp	°C	-40	+85	±5°C	Industrial
			-5	+85	±5°C	Extended
			0	+70	±5 °C	Commercial
Transceiver Supply Voltage	DDDVoltage	V	3.15	3.45	±3%	
Transmitter Bias Current	DDDBias	mA	0	35	±10%	
Transmitter Output Power	DDDTx-Power	dBm	-5	+5	±3dB	

Receiver Average Optical Input Power	DDDRx-Power	dBm	-16	-3	±3dB	
--------------------------------------	-------------	-----	-----	----	------	--

I Transceiver Block Diagram

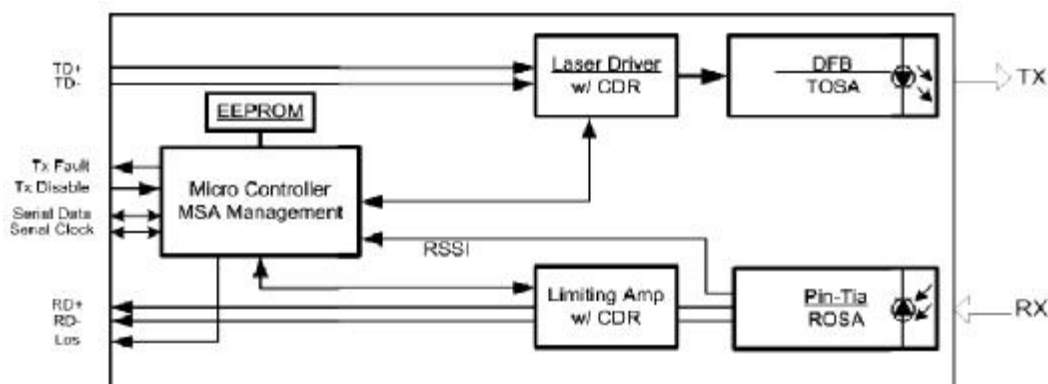


Recommended Circuit:

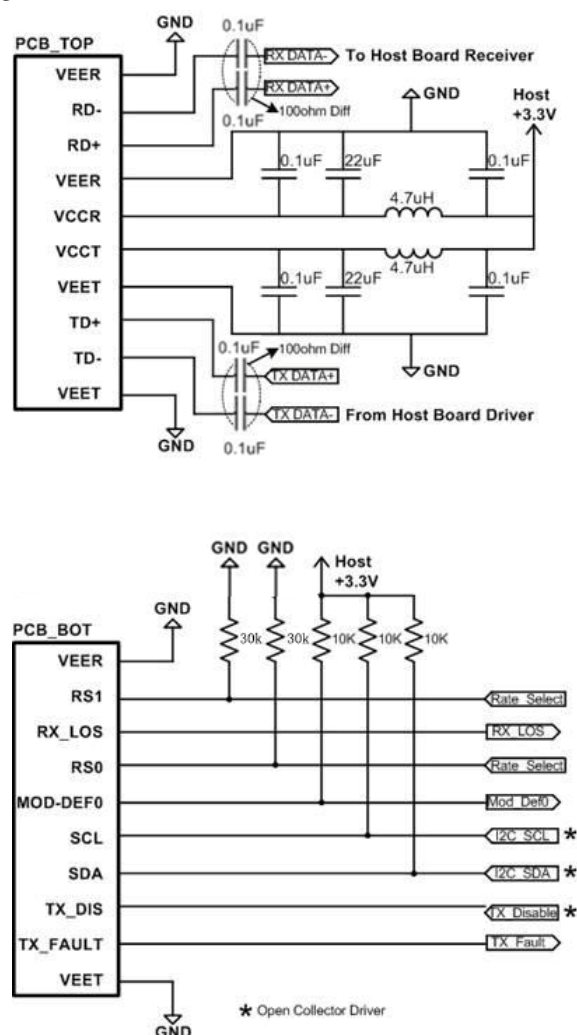

Recommended High-speed Interface Circuit

Mechanical Dimensions:

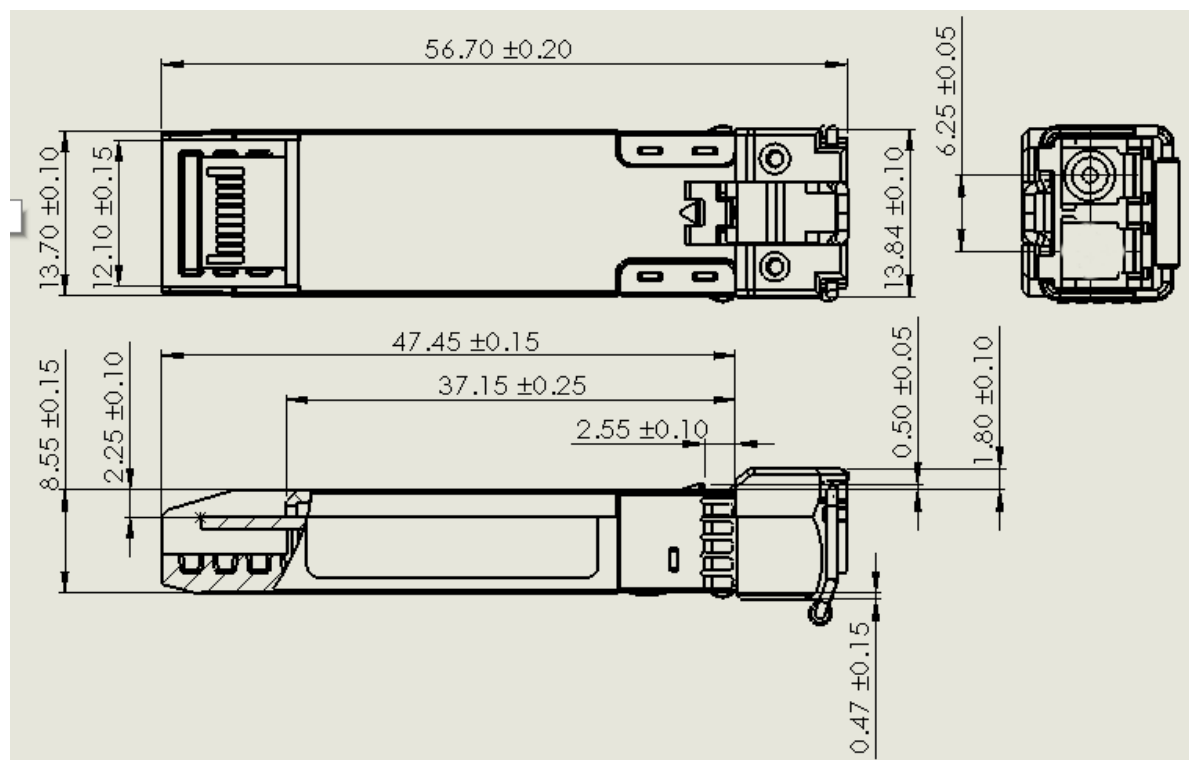

Specifications are subject to change without notice. It is a registered trademark of 3C-LINK OPTOC Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications can be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from 3C-LINK OPTOC Co., Ltd.